

the outdoor greatroom company

PRODUCT SPEC SHEET


COVE LINEAR SUPERCAST™ GAS FIRE PIT - MANUAL IGNITION

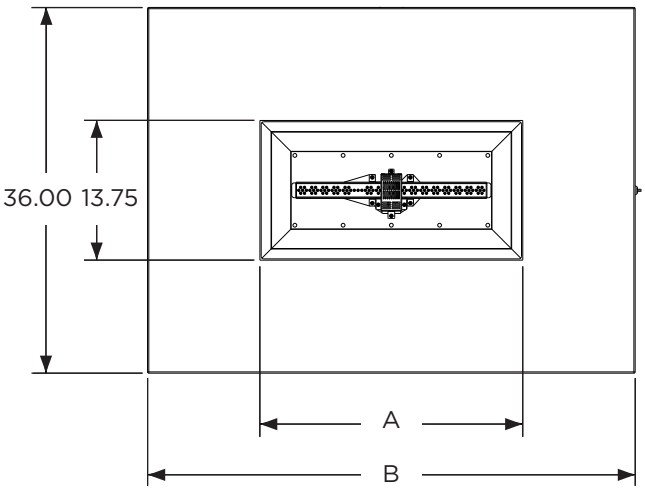


TOP VIEW

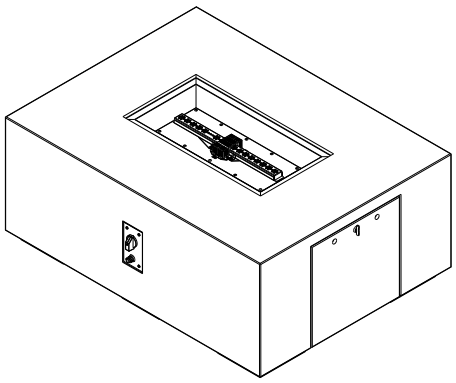

ISOMETRIC VIEW

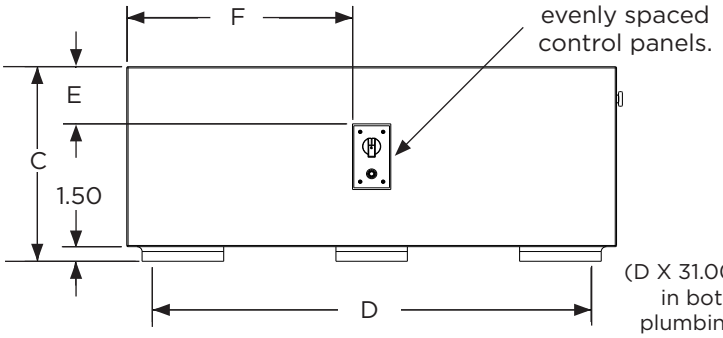

FRONT VIEW

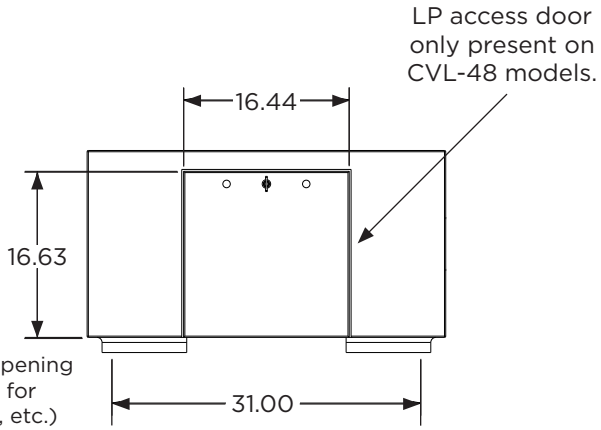

RIGHT VIEW

ITEM CODE	BURNER INCLUDED	BTU/hr.	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	WEIGHT(lbs.)
CVL-48(XX)	CFP1224-B	55,000	25.88	48.00	22.00	43.00	6.88	22.13	400
CVL-84(XX)	CFP1264-B	100,000	64.56	84.00	16.00	79.00	3.88	40.13	555
CVL-96(XX)	CFP1272-B	120,000	72.25	96.00	16.00	91.00	3.88	29.69	630

Technical Specifications:

1. CLEARANCE TO COMBUSTIBLES
   - 72” from top of burner to any overhead combustible material. 24” from edge of burner trim to any combustible side wall materials. 4” from bottom of burner to combustible floor materials
2. GAS SUPPLY
   - Natural Gas - Operating Supply Pressure: Min 6” WC; Max 10.5” WC; IDEAL 7” WC
   - Liquid Propane - Operating Supply Pressure: Min 8” WC; Max 14” WC; IDEAL 11” WC
3. CONTROLS
   - Thermocouple safety valve and push-button sparker
   - Valve connected to burner; intended for installation on base control panel
4. BURNER LISTING
   - Standard: ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
   - Testing Agency: Underwriters Laboratories (UL LLC)
5. BASE MATERIAL
   - Glass-fiber reinforced concrete
   - Non-combustible material tested to ASTM E136-16

BASE COLOR DESIGNATORS (XX)	
NG	NATURAL GREY
WT	WHITE
LN	LINEN
MM	MIDNIGHT MIST
LT	LATTE
ES	EARTHSTONE